


LED Wrap Installation Guide

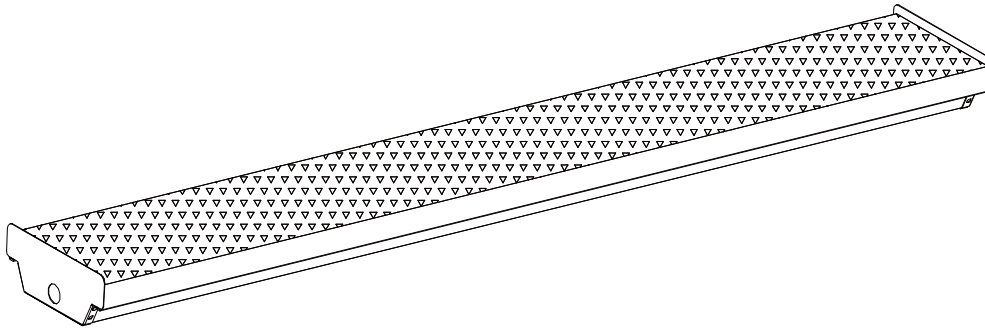

⚠ WARNING

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

⚠ WARNING

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.

⚠ CAUTION

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Risk of burn. Disconnect power and allow fixture to cool before changing bulb or handing fixture.


NOTICE: Green ground screw provided in proper location. Do not relocate.

NOTICE: Minimum 90° supply conductors.

NOTICE: Specifications and dimensions subject to change without notice.

NOTICE: Suitable for Dry or Damp location.

General Wiring Diagram

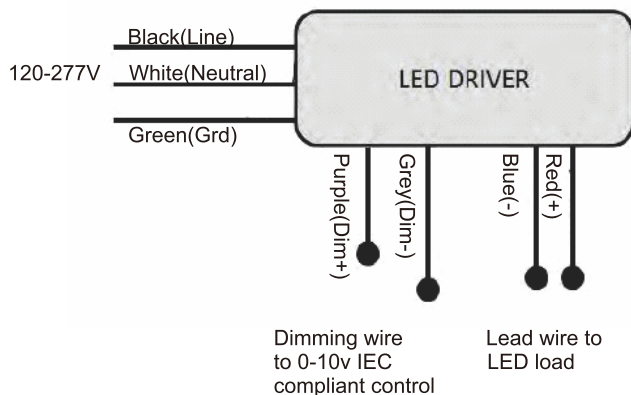

Warning:

All units must be individually connected to the AC Supply
Select appropriate access point for your installation, remove knockout, and feed power leads through hole. Connect the supply wire from the source to the driver.

Black = Line White = Neutral Green = Ground
**Consult with dimmer control manufacturer's wiring instructions.

Operating Characteristic

Voltage input: 120-277V 50/60 Hz

Operating temp: -40°F (-40°C) to 122°F (50°C)

**Consult with dimmer control manufacturer's wiring instructions.



LED Wrap Installation Guide

Installation Step:


⚠ WARNING: Always turn off the power supply from main circuit breaker first!

NOTICE: Installation kits of Chain suspended mounting were not included.


A-Chain Suspended Mounting

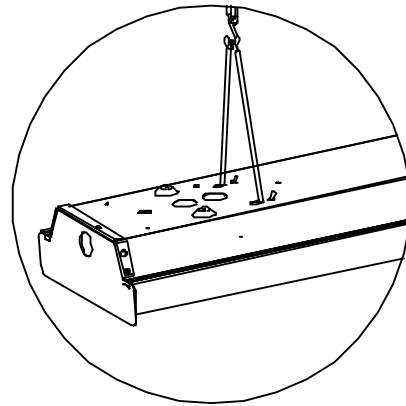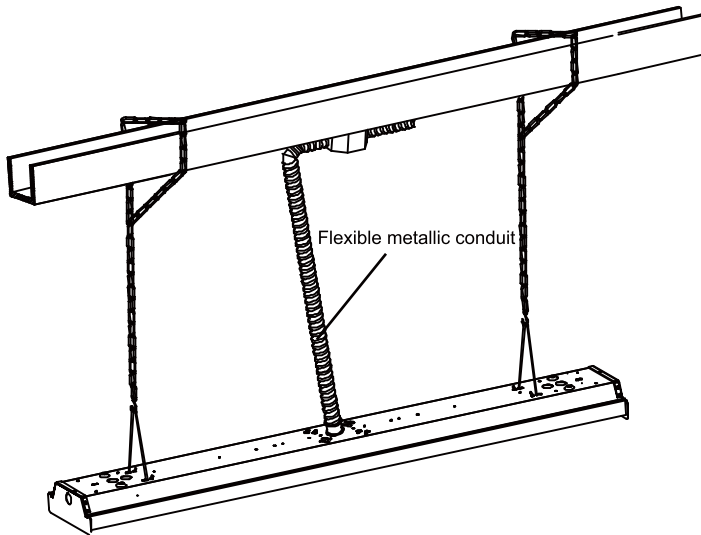


B-Surface Mounting

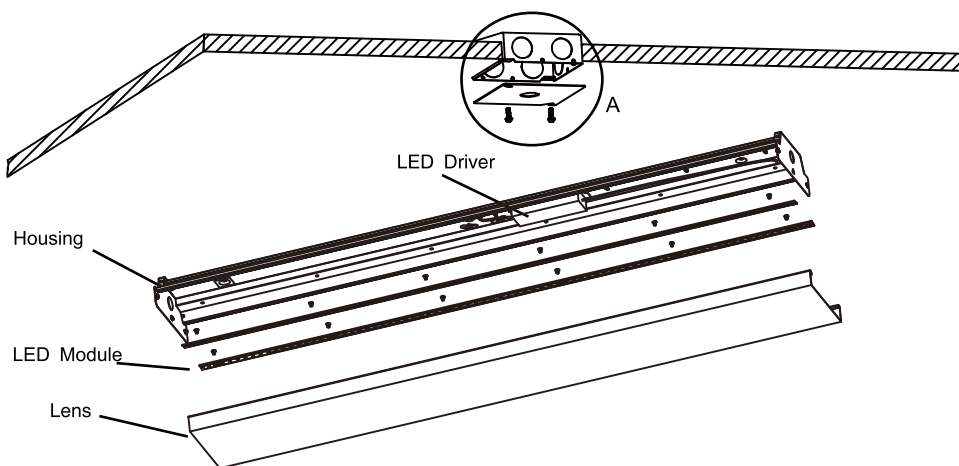

Concealed outlet box



Knock-off holes



A-Chain Mounting with V hook

Step1: Clip the brackets to the slots of fixture

Step2: Attach the V-hooks to brackets.

Step3: Attach the chain to the V-hooks and mounting surface.

B-Surface Mounting

Step1: Remove lens by pulling from one side of the fixture and hinge on the other.

Step2: Using the provided mounting holes on each end of the fixture housing.

Step3: Make electrical connections according to code.

Step4: Install channel cover.

Step5: Install lens on one side of the fixture and rotate to engage the opposite side.