

TEMPORARY LIGHT INSTRUCTION

MODEL# 30TP02LED50U

TEMPROLITE™

⚠ IMPORTANT:

READ CAREFULLY BEFORE OPERATING THIS FIXTURE. SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE. THIS FIXTURE MUST BE WIRED IN ACCORDANCE WITH NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES. PROPER GROUNDING IS REQUIRED FOR SAFETY. WE STRONGLY ENCOURAGE ONLY A LICENSED ELECTRICIAN INSTALL, OPERATE AND MAINTAIN THIS PRODUCT. IF YOU ARE NOT QUALIFIED OR UNFAMILIAR WITH ANY ASPECT OF THIS INSTRUCTION SHEET, CONSULT AN ELECTRICIAN. THERE ARE NO SERVICEABLE PARTS INSIDE.

⚠ WARNING:

RISK OF FIRE AND ELECTRIC SHOCK-DISCONNECT POWER AT BREAKER BEFORE WIRING OR SERVICING.

RISK OF PERSONAL INJURY-FIXTURE MAY BECOME UNSTABLE OR DAMAGED IF NOT INSTALLED PROPERLY.


RISK OF BURN-ALLOW FIXTURE TO COOL BEFORE SERVICING.

USE ONLY THREE-WIRE OUTDOOR EXTENSION CORDS THAT HAVE THREE-PRONG GROUNDING PLUGS AND GROUNDING RECEPTACLES THAT ACCEPT THE APPLIANCE'S PLUG.

GROUND FAULT CIRCUIT INTERRUPTER(GFCI) PROTECTION IS TO BE PROVIDED ON THE CIRCUIT(S) OR OUTLET(S) TO BE USED FOR THE WET LOCATION PORTABLE LUMINAIRE. RECEPTACLES ARE AVAILABLE HAVING BUILT-IN GFCI PROTECTION AND ARE ABLE TO BE USED TO THIS MEASURE OF SAFETY.

USE ONLY WITH EXTENSION CORD FOR OUTDOOR USE, SUCH AS AN EXTENSION CORD OF CORD TYPE SEW, SEOW, SEOWW, SOW, SOOW, STW, STOW, STOOW, SJEW, SJEOW, SJEOWW, SJW, SJOW, SJOOW, SJTW, SJTOW OR SJTOOW.

DIMENSION

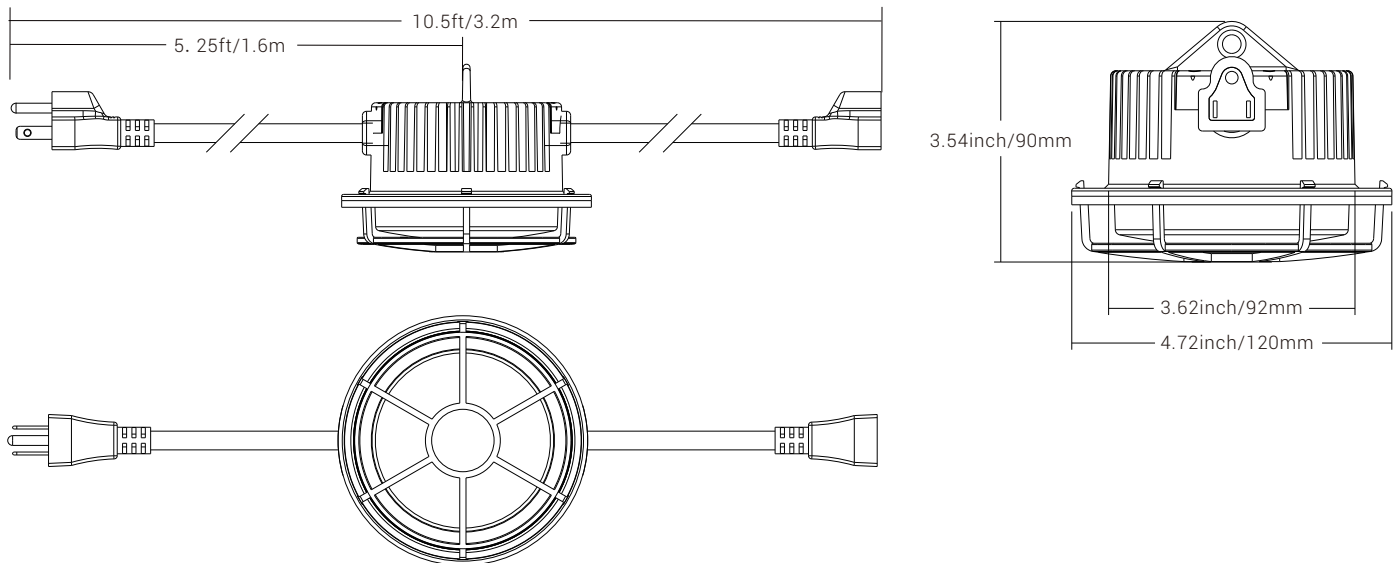

INSTALLATION

- 1, Clip fixture to a secure mounting point using supplied Carabiner.
- 2, Connect the fixture to power using the plug, input voltage 120-277VAC.
- 3, Daisy chain multiple fixtures if needed.

